


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
STOLL	16	13	2000	4000	20000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

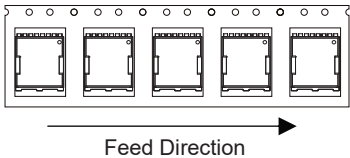
Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
STOLL	16		15	35

Embossed carrier Tape specifications

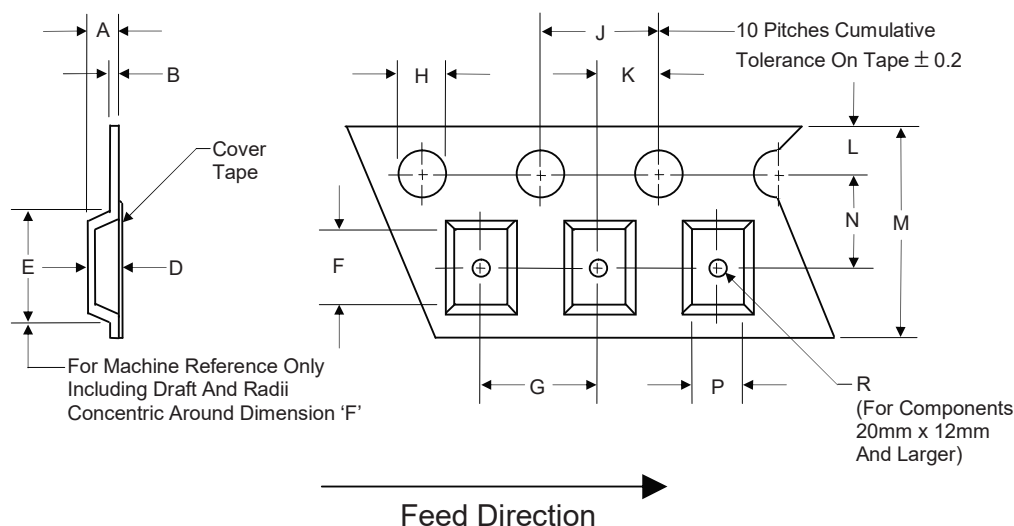

Tape Width	H	L	J	B	D	F	P
16mm	1.55	1.75	4.0	0.3	/	8.6	7.6
(Tolerance)	±0.05	±0.1	±0.1	±0.03	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
16mm	/	1.5	7.5	2.7	2.0	/	12.0
(Tolerance)	/	MIN	±0.1	±0.1	±0.1	/	±0.1

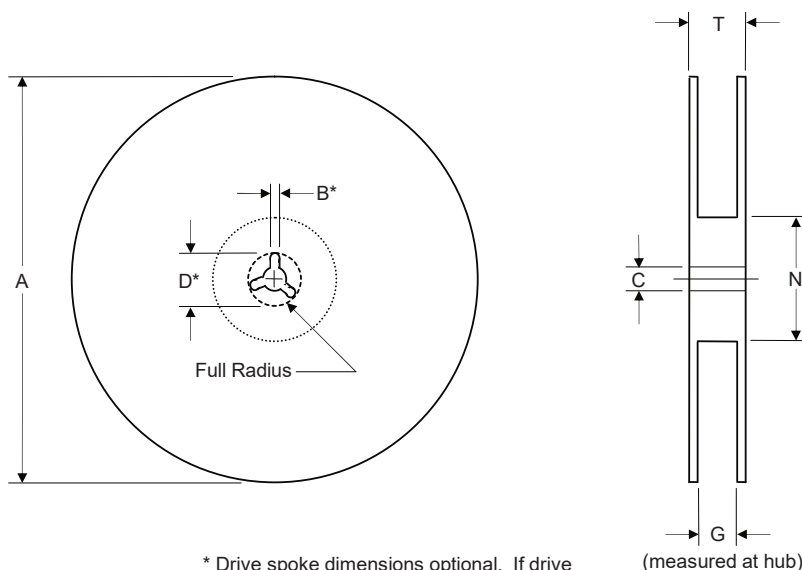


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
24mm	330	/	/	/	/	/	/
(Tolerance)	±2.0	/	/	/	/	/	/


Dimensions

Inbox size

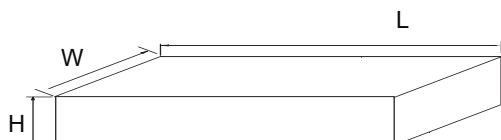

Dimension	Specification(mm typical)
	General
L	370
W	340
H	55

Carton size

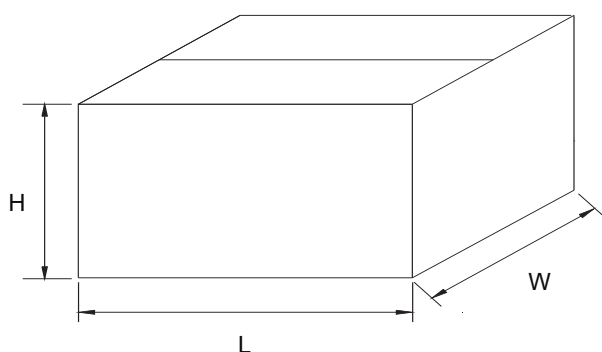

Dimension	Specification(mm typical)
	General
L	385
W	365
H	315