


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
TO-263	24	13	800	800	4800


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
TO-263	24		20	30


Embossed carrier Tape specifications

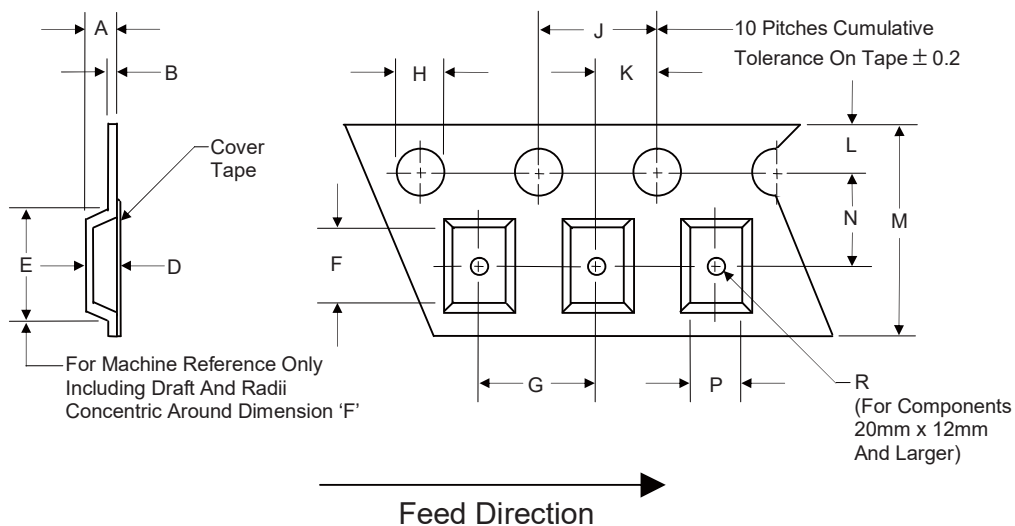

Tape Width	H	L	J	B	D	F	P
24mm	1.5	1.75	4.0	0.4	/	16.25	10.8
(Tolerance)	±0.1	±0.1	±0.1	±0.05	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
24mm	17.1	1.5	11.5	5.5	/	24.0	16.0
(Tolerance)	±0.1	±0.1	±0.1	±0.3	/	±0.1	±0.1

Surface Mount Reel Specifications

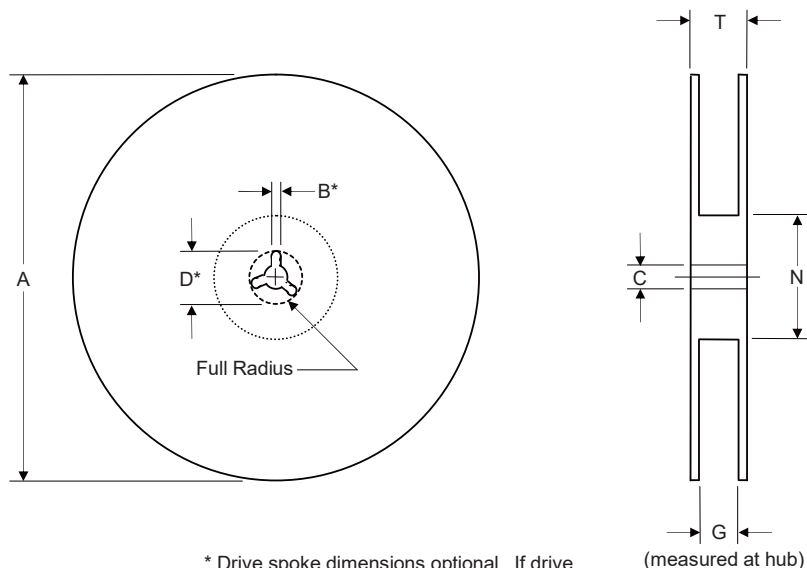

* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
24mm	330	2.5	13.2	20.0	100	25	29.2
(Tolerance)	±2.0	±0.5	±0.3	±0.5	±0.5	±0.5	±0.5


Dimensions

Inbox size



Dimension	Specification(mm typical)
	General
L	355
W	345
H	60

Carton size

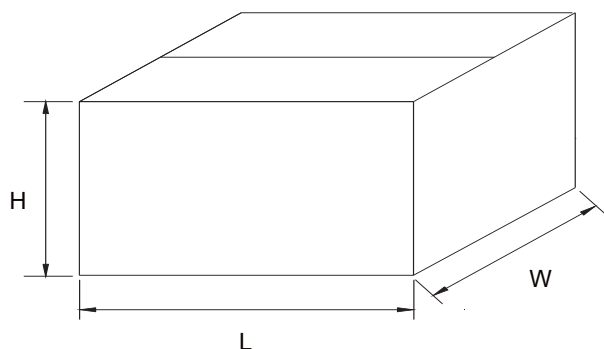

Dimension	Specification(mm typical)
	General
L	390
W	375
H	360


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
TO-263	24	13	800	800	4000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
TO-263	24		15	15


Embossed carrier Tape specifications

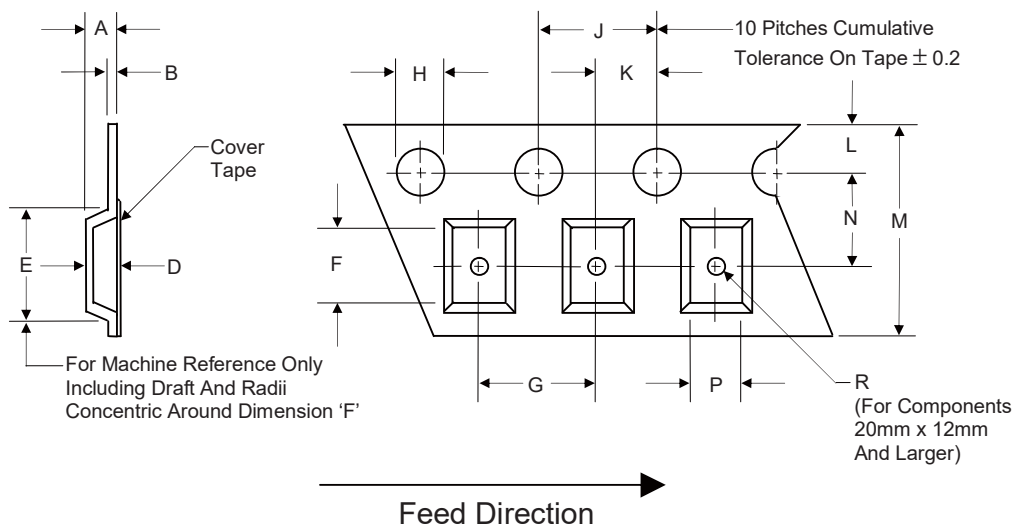

Tape Width	H	L	J	B	D	F	P
24mm	1.55	1.75	4.0	0.35	/	16.13	10.8
(Tolerance)	±0.05	±0.1	±0.1	±0.02	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
24mm	/	2.0	11.5	5.15	2.0	24.0	16.0
(Tolerance)	/	+0.25	±0.1	±0.1	±0.1	+0.3/-0.1	±0.1


Surface Mount Reel Specifications

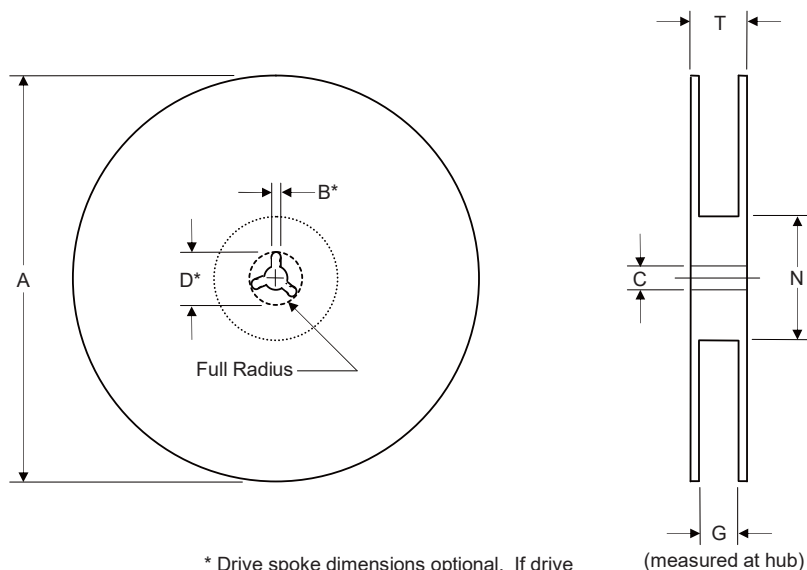

Tape Width	A	B	C	D	N	G	T
24mm	330	2.0	13.0	21.0	100	24.4	29.4
(Tolerance)	±2.0	±0.5	+0.5/-0.2	±0.5	±0.5	+0.2	+1.0/-0.5


Dimensions

Inbox size

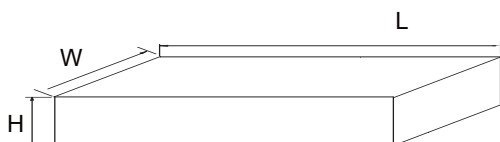

Dimension	Specification(mm typical)
	General
L	356
W	335
H	50

Carton size

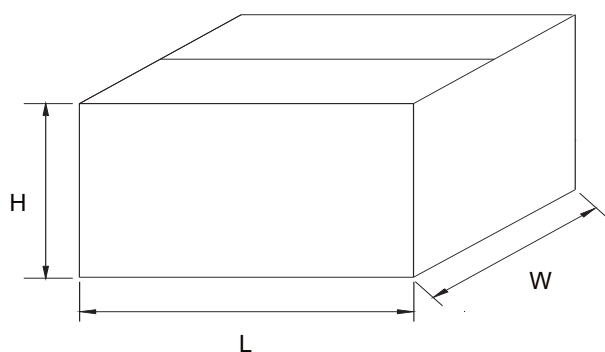

Dimension	Specification(mm typical)
	General
L	385
W	285
H	358


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
TO-263	24	13	800	800	4000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
TO-263	24		30	empty components at finish wind a lap


Embossed carrier Tape specifications

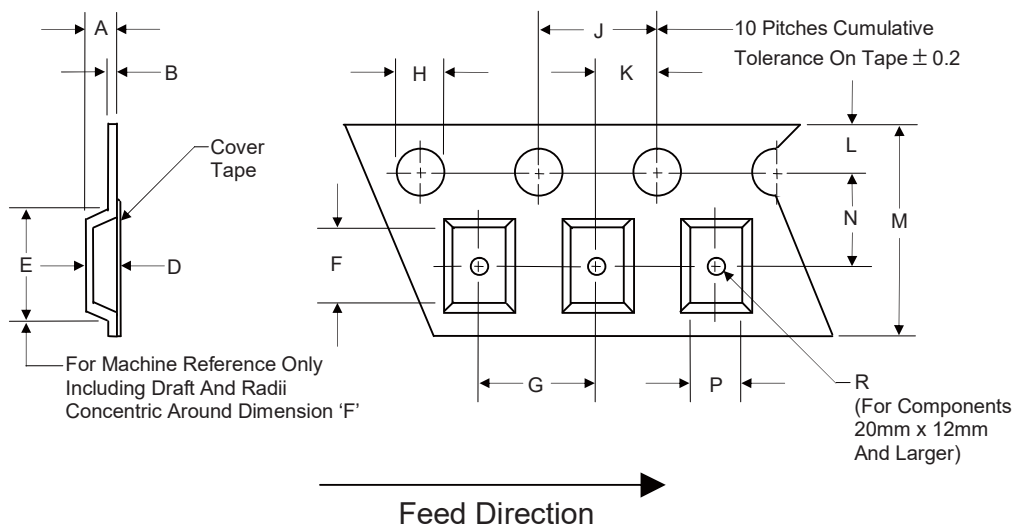

Tape Width	H	L	J	B	D	F	P
24mm	1.55	1.75	4.0	0.35	/	16.3	10.8
(Tolerance)	±0.05	±0.1	±0.1	±0.05	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
24mm	17.2	1.5	11.5	4.85	2.0	24.0	16.0
(Tolerance)	±0.1	±0.1	±0.1	±0.1	±0.1	±0.3	±0.1

Surface Mount Reel Specifications

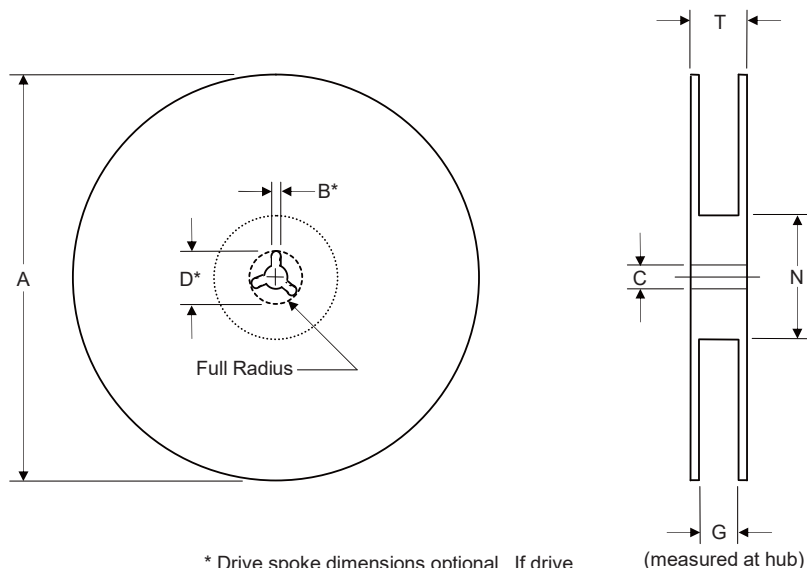

* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
24mm	330	2.0	13.0	/	100	24.4	30.4
(Tolerance)	±2.0	+0.5/-0.2	+0.5/-0.2	/	±0.5	+1.0	MAX


Dimensions

Inbox size



Dimension	Specification(mm typical)
	General
L	370
W	340
H	55

Carton size

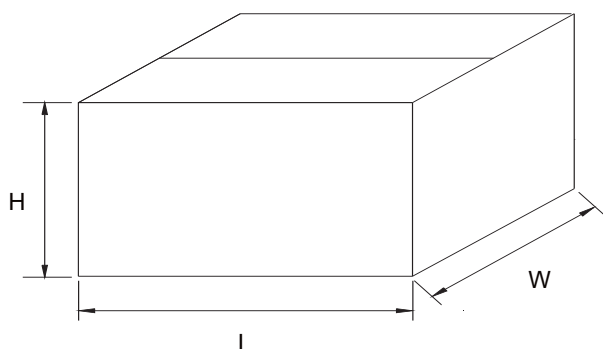

Dimension	Specification(mm typical)
	General
L	385
W	365
H	315


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
TO-263	24	13	800	800	4000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
TO-263	24		30	50


Embossed carrier Tape specifications

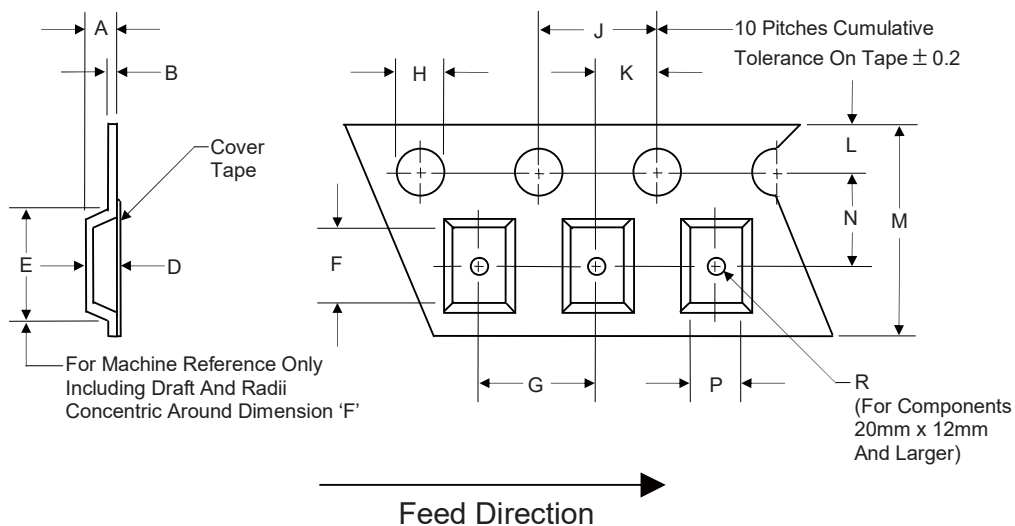

Tape Width	H	L	J	B	D	F	P
24mm	1.5	1.75	4.0	/	/	16.13	10.8
(Tolerance)	±0.1	±0.1	±0.1	/	/	/	/

Tape Width	E	R	N	A	K	M	G
24mm	/	1.5	11.5	5.15	2.0	24.0	16.0
(Tolerance)	/	+2.5	±0.1	/	±0.1	+0.3/-0.1	±0.1

Surface Mount Reel Specifications

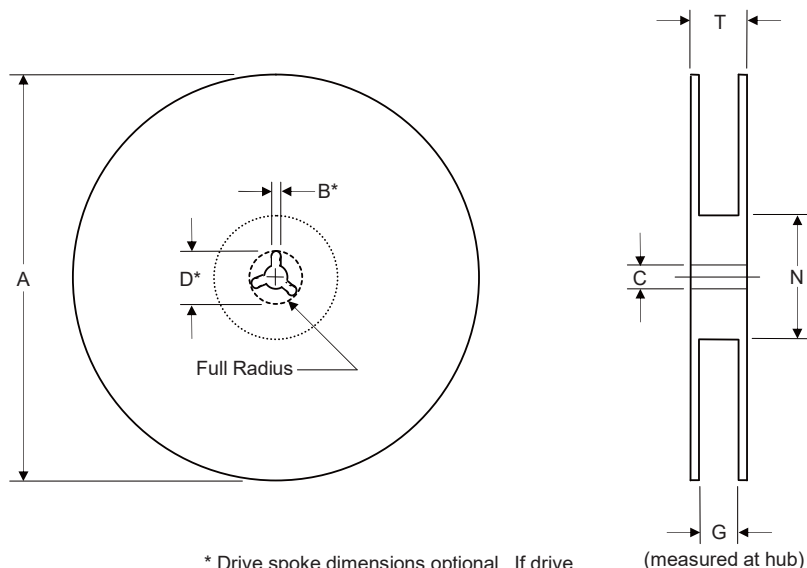

* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
24mm	330	2.0	13.0	21.0	100	24.4	29.4
(Tolerance)	±2.0	±0.5	+0.5/-0.2	±0.5	±0.5	+0.2	+1.0/-0.5


Dimensions

Inbox size



Dimension	Specification(mm typical)
	General
L	362
W	356
H	63

Carton size

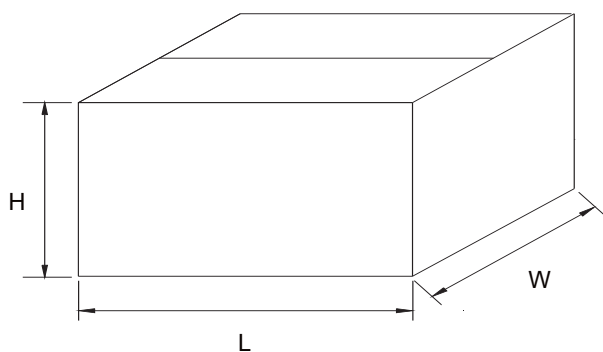

Dimension	Specification(mm typical)
	General
L	379
W	338
H	381