


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
DFN8X8-4L	16	13	3000	3000	15000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
DFN8X8-4L	16		60	80



Embossed carrier Tape specifications

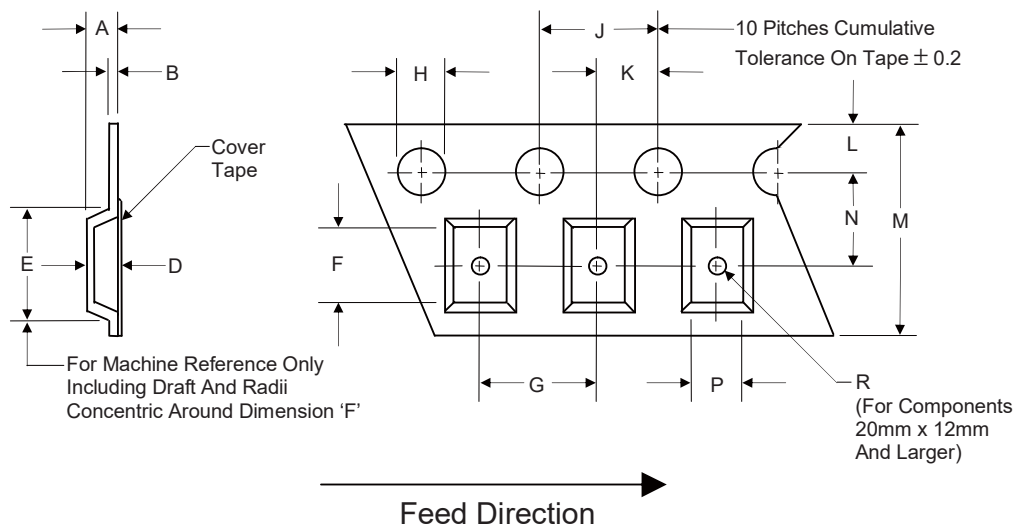

Tape Width	H	L	J	B	D	F	P
16mm	1.5	1.75	4.0	0.3	/	8.3	8.3
(Tolerance)	+0.1	±0.1	±0.1	±0.05	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
16mm	8.9	1.5	7.5	1.1	2.0	16.0	12.0
(Tolerance)	MIN	±0.25	±0.1	MIN	±0.1	±0.3	±0.1

Surface Mount Reel Specifications

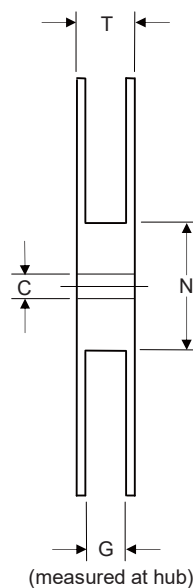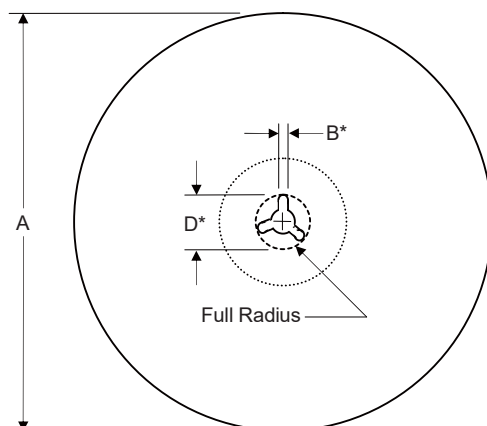


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
16mm	330	2.0	13.0	21	100	16.4	21.4
(Tolerance)	±2.0	±0.5	+0.5/-0.2	±0.5	±0.5	+0.2	+0.2/-0.5


Dimensions

Inbox size

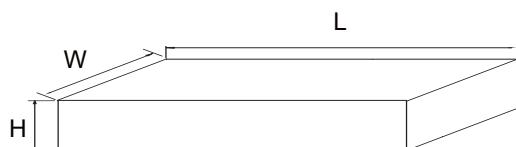

Dimension	Specification(mm typical)
	General
L	362
W	356
H	63

Carton sizeFeed Direction

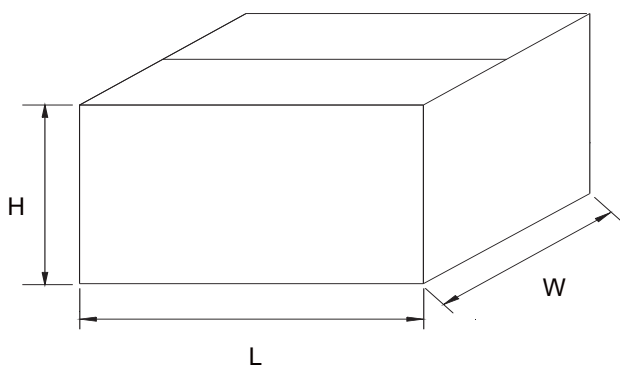

Dimension	Specification(mm typical)
	General
L	379
W	338
H	381