


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
TOLL-8L	24	13	2000	2000	10000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

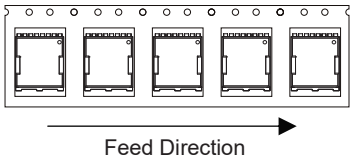
Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
TOLL-8L	24		20	35

Embossed carrier Tape specifications

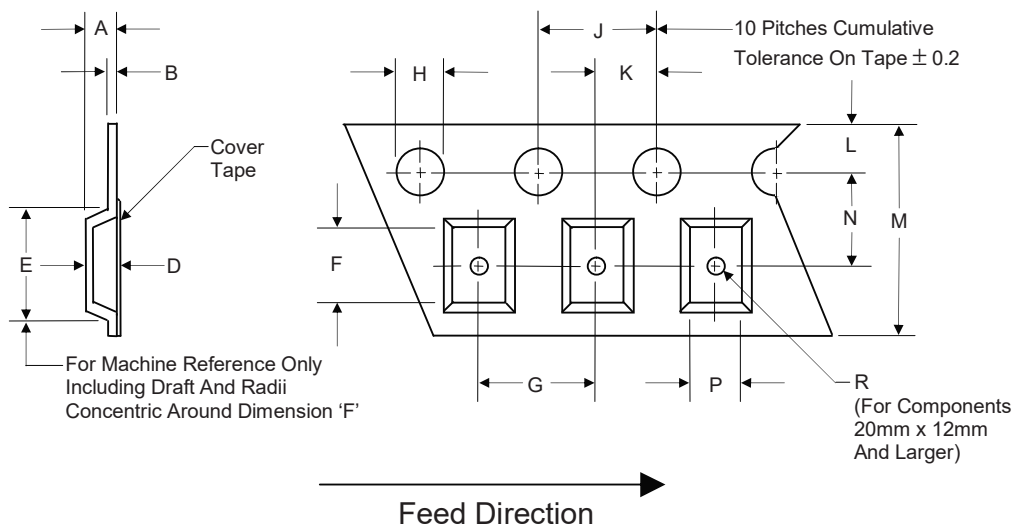

Tape Width	H	L	J	B	D	F	P
24mm	1.55	1.75	4.0	0.3	/	12.04	10.22
(Tolerance)	±0.1	±0.1	±0.1	±0.05	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
24mm	13.34	1.55	11.5	2.7	2.0	24.0	12.0
(Tolerance)	±0.05	±0.1	±0.1	±0.1	±0.1	±0.2	±0.1

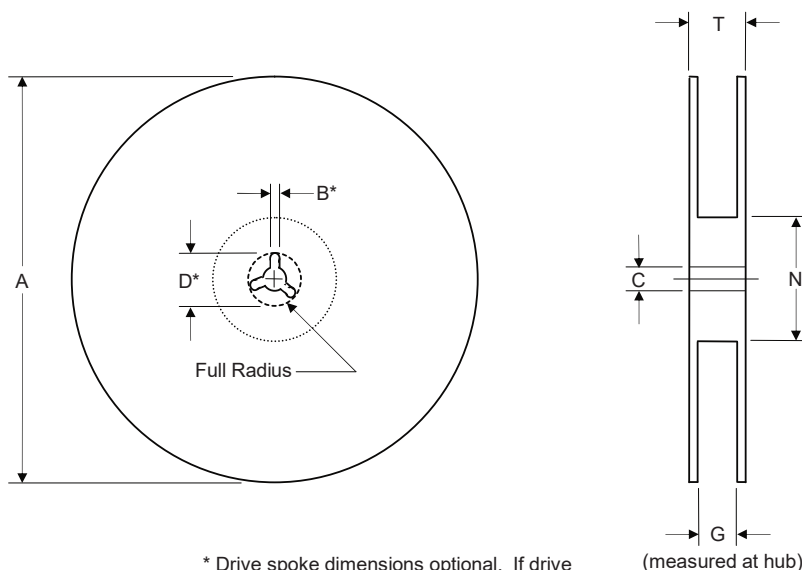


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
24mm	330	2.0	13.0	21.0	100	24.4	29.4
(Tolerance)	±2.0	±0.5	+0.5/-0.2	±0.5	±0.5	+0.2	+1.0/-0.5


Dimensions

Inbox size



Dimension	Specification(mm typical)
	General
L	356
W	335
H	50

Carton size

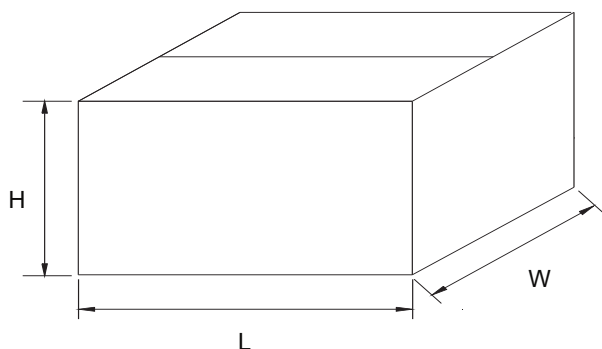

Dimension	Specification(mm typical)
	General
L	385
W	285
H	358


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
TOLL-8L	24	13	2000	2000	10000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

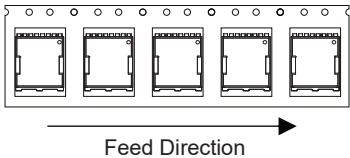
Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
TOLL-8L	24		60	80

Embossed carrier Tape specifications

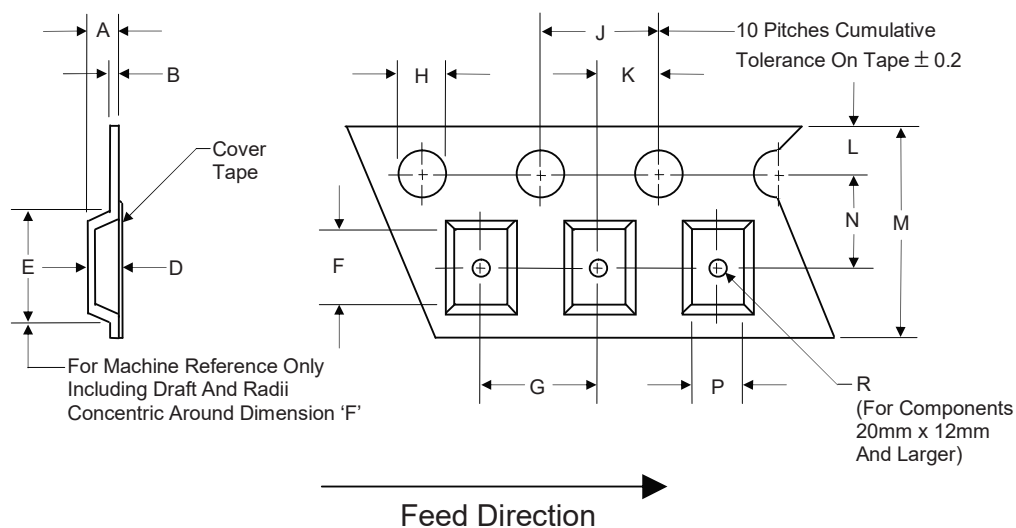

Tape Width	H	L	J	B	D	F	P
24mm	1.5	1.75	4.0	0.28	/	12.28	10.5
(Tolerance)	+0.1	±0.1	±0.1	±0.05	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
24mm	/	1.5	11.5	2.55	2.0	24.0	12.0
(Tolerance)	/	+0.25	±0.1	±0.1	±0.1	±0.3	±0.1

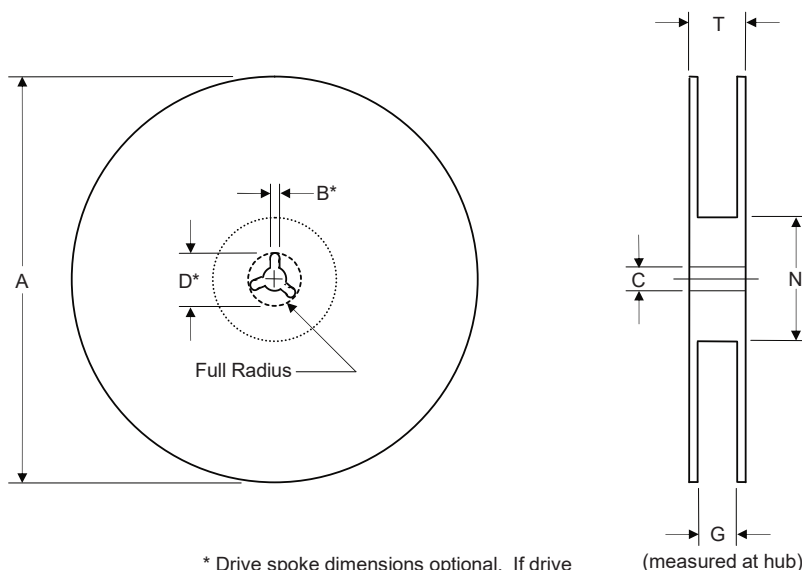


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
24mm	330	2.0	13.0	21.0	100	24.4	29.4
(Tolerance)	±2.0	±0.5	+0.5/-0.2	±0.5	±0.5	+0.2	+1.0/-0.5


Dimensions

Inbox size

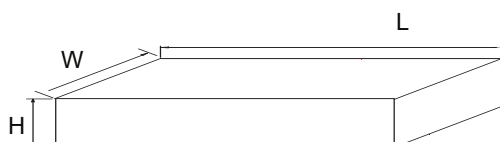

Dimension	Specification(mm typical)
	General
L	362
W	356
H	63

Carton size

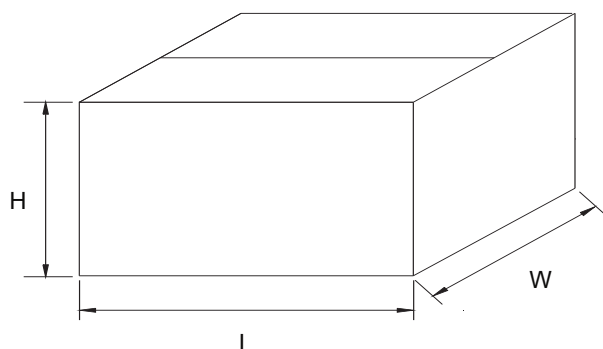

Dimension	Specification(mm typical)
	General
L	379
W	338
H	381


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
TOLL-8L	24	13	2000	2000	12000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

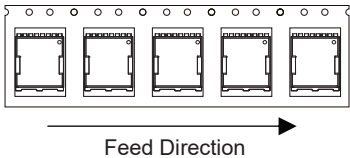
Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
TOLL-8L	24		35	45

Embossed carrier Tape specifications

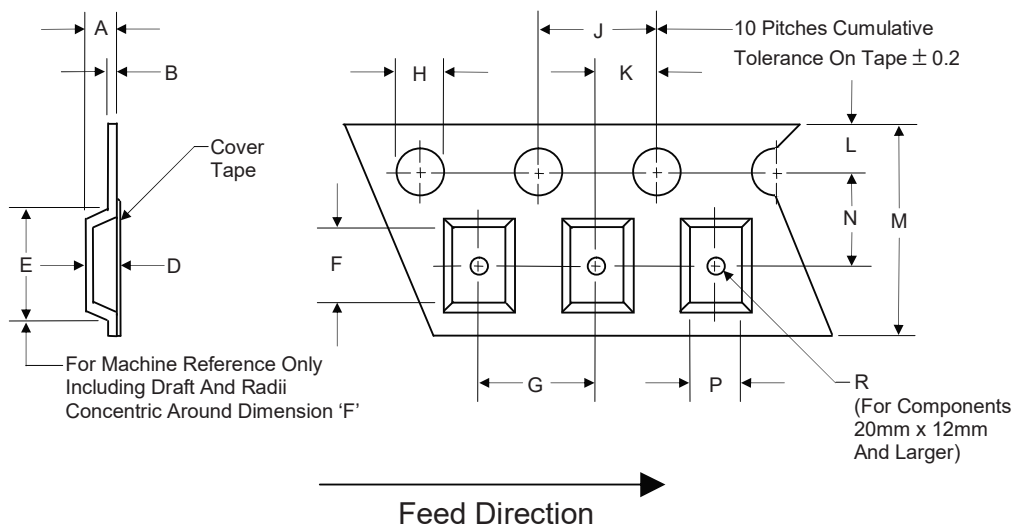

Tape Width	H	L	J	B	D	F	P
24mm	1.5	1.75	4.0	0.3	/	12.5	10.2
(Tolerance)	±0.1	±0.1	±0.1	±0.05	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
24mm	/	1.5	11.5	2.55	2.0	/	12.0
(Tolerance)	/	±0.25	±0.1	±0.1	±0.1	/	±0.1

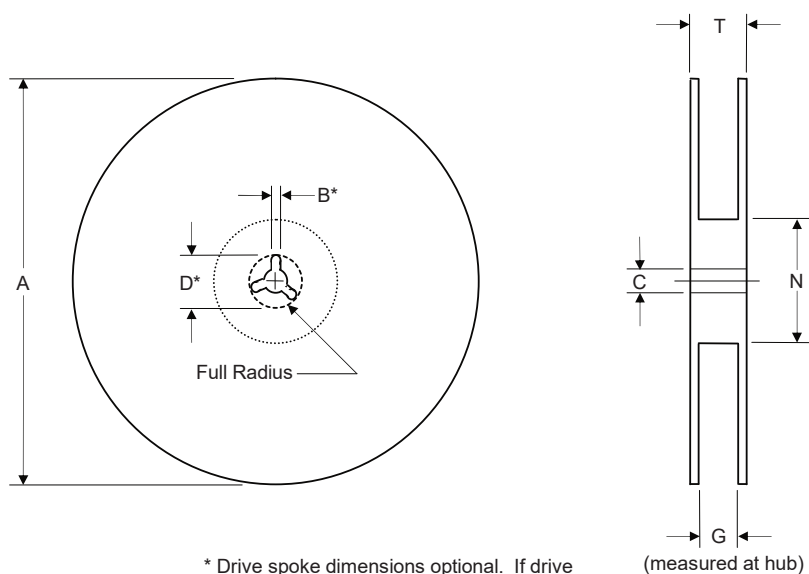


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
24mm	330	2.6	/	/	100.5	25	29.0
(Tolerance)	±2.0	±0.2	/	/	±0.5	±0.5	±0.5


Dimensions

Inbox size

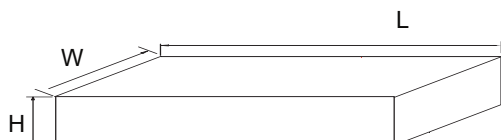

Dimension	Specification(mm typical)
	General
L	368
W	355
H	45

Carton size

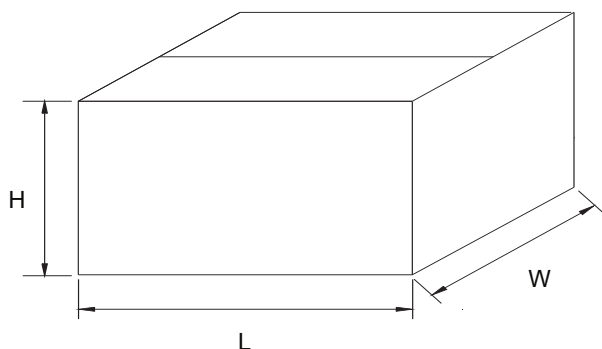

Dimension	Specification(mm typical)
	General
L	380
W	375
H	300