


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
PQFN5X6	12	13	5000	10000	50000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification



Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
PQFN5X6	12		25	50

Embossed carrier Tape specifications

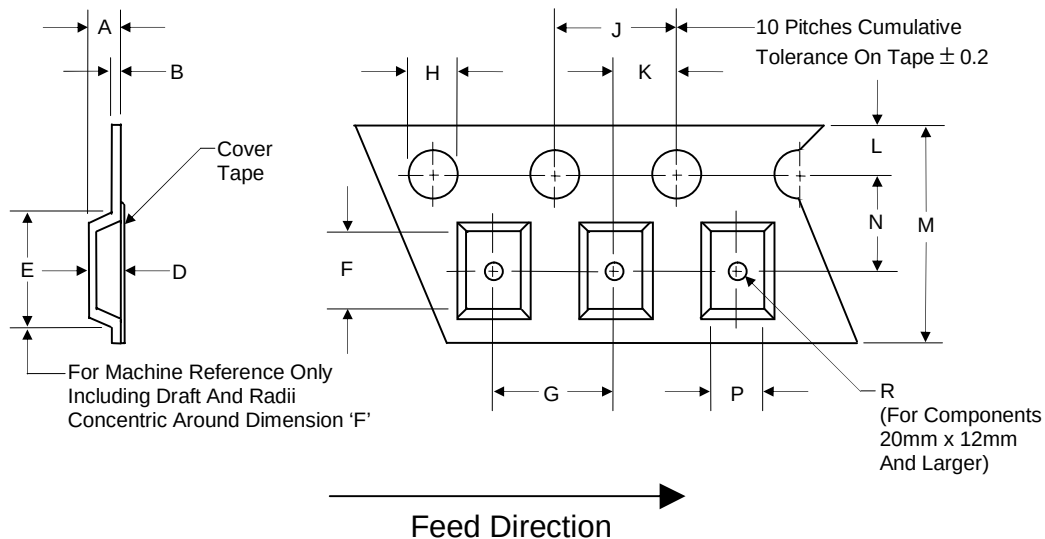

Tape Width	H	L	J	B	D	F	P
12mm	1.5	1.75	4.0	0.25	/	5.70	6.5
(Tolerance)	+0.1	±0.1	±0.1	±0.02	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
12mm	5.95	1.5	5.5	0.95	2.2	12.0	8.0
(Tolerance)	±0.1	+0.25	±0.05	±0.1	±0.05	+0.3/-0.1	±0.1

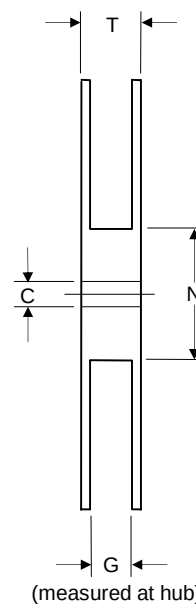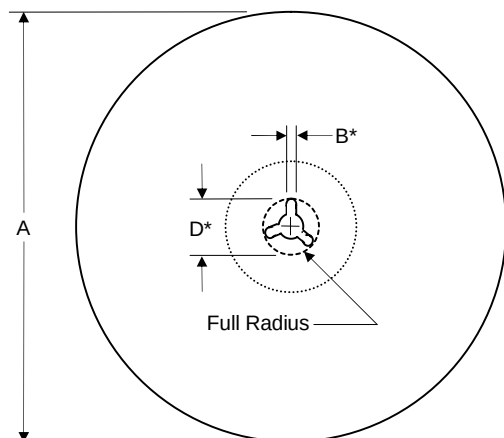

* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
12mm	330	/	/	/	/	12.4	16.6
(Tolerance)	+2.0/-1.5	/	/	/	/	+2.0	+3.6/-0


Dimensions

Inbox size



Dimension	Specification(mm typical)
	General
L	356
W	335
H	50

Carton sizeFeed Direction

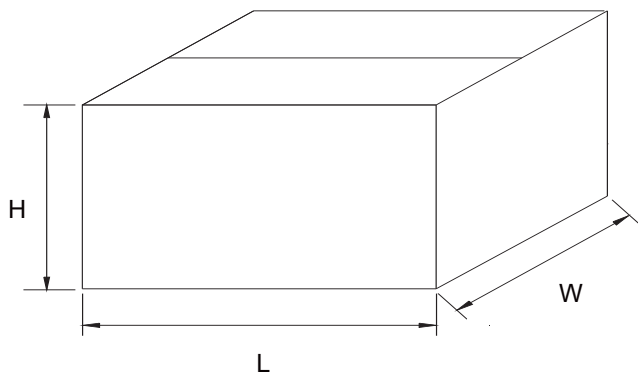

Dimension	Specification(mm typical)
	General
L	385
W	285
H	358