


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
SOT-223	12	13	2500	5000	30000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
SOT-223	12		25	50



Embossed carrier Tape specifications

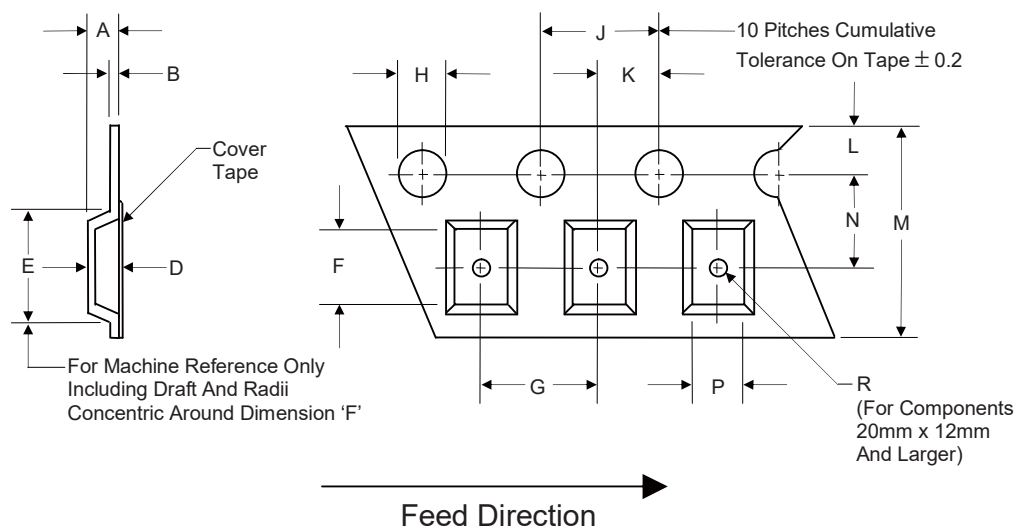

Tape Width	H	L	J	B	D	F	P
12mm	1.5	1.75	4.0	0.30	2.0	/	7.0
(Tolerance)	±0.1	±0.1	±0.1	±0.05	±0.1	/	+0.1/-0.05

Tape Width	E	R	N	A	K	M	G
12mm	7.42	1.5	5.5	/	2.0	12.0	8.0
(Tolerance)	±0.1	±0.25	±0.1	/	±0.05	+0.3/-0.1	±0.1

Surface Mount Reel Specifications

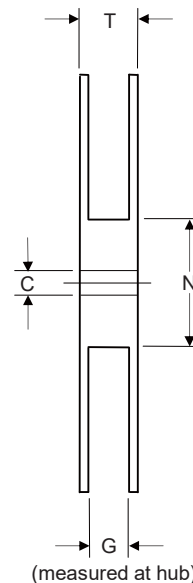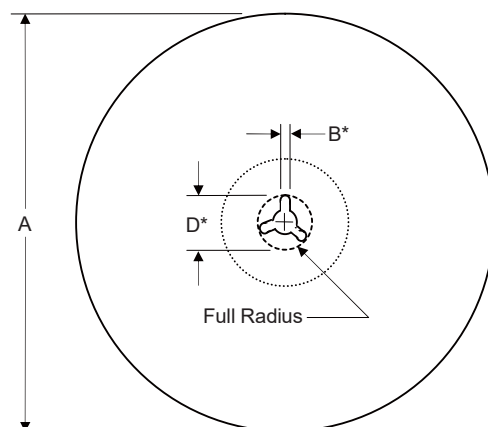


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
12mm	330	2.0	6.9	22.0	100	12.4	12.4
(Tolerance)	±2.0	±0.5	/	±0.5	±1	+2	+3.6


Dimensions

Inbox size

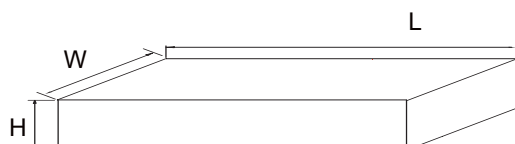

Dimension	Specification(mm typical)
	General
L	356
W	335
H	50

Carton sizeFeed Direction

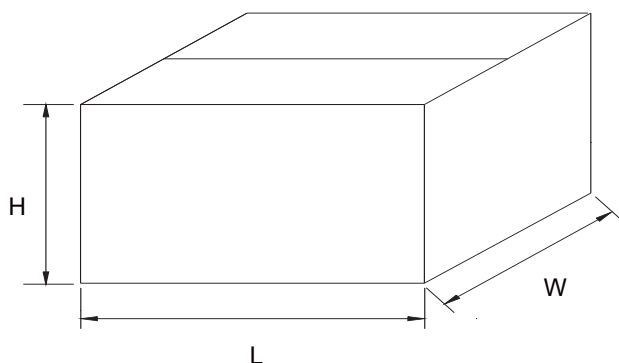

Dimension	Specification(mm typical)
	General
L	370
W	355
H	367


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
SOT-223	12	13	2500	5000	40000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
SOT-223	12		50	50



Embossed carrier Tape specifications

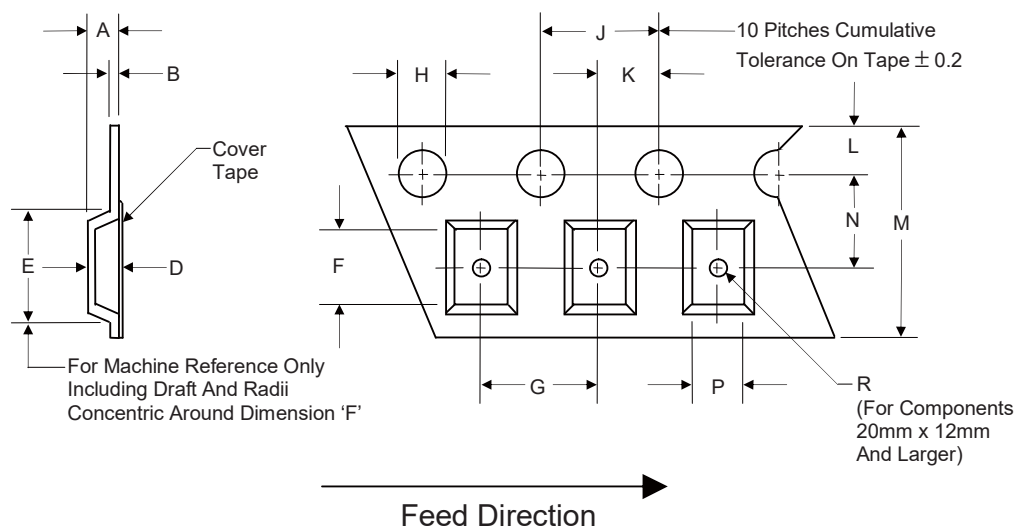

Tape Width	H	L	J	B	D	F	P
12mm	1.5	1.75	4.0	/	/	7.25	6.55
(Tolerance)	+0.1	±0.1	±0.1	/	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
12mm	/	1.5	5.5	/	2	/	8.0
(Tolerance)	/	+0.25	±0.05	/	±0.2	/	±0.1

Surface Mount Reel Specifications

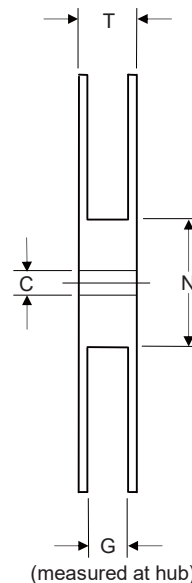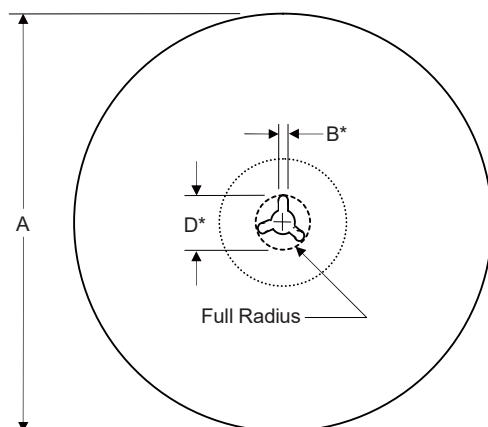


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
12mm	330	2.8	17.2	22.5	100	13.2	17.2
(Tolerance)	±2.0	±0.2	±0.5	±0.5	±0.5	+3/-1	±0.4


Dimensions

Inbox size

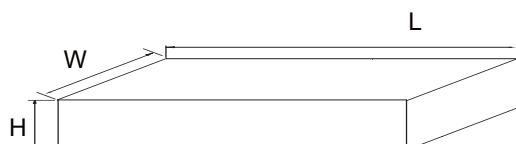

Dimension	Specification(mm typical)
	General
L	365
W	360
H	60

Carton sizeFeed Direction

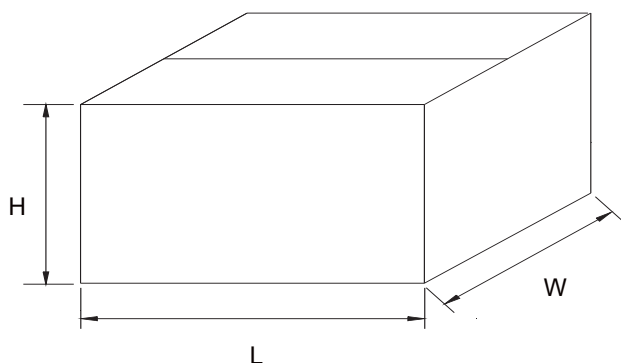

Dimension	Specification(mm typical)
	General
L	520
W	386
H	385


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
SOT-223	12	13	2500	5000	30000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
SOT-223	12		50	30



Embossed carrier Tape specifications

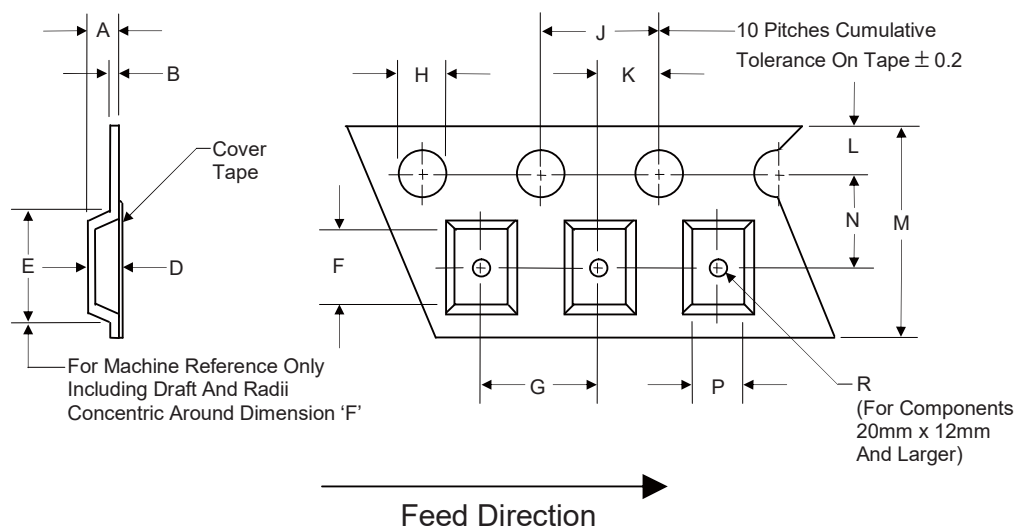

Tape Width	H	L	J	B	D	F	P
12mm	1.5	1.75	4.0	0.25	/	6.9	7.3
(Tolerance)	±0.1	±0.1	±0.1	±0.02	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
12mm	7.8	1.5	5.5	2.1	/	12.0	8.0
(Tolerance)	MIN	+0.1	±0.1	±0.1	/	±0.1	±0.1

Surface Mount Reel Specifications

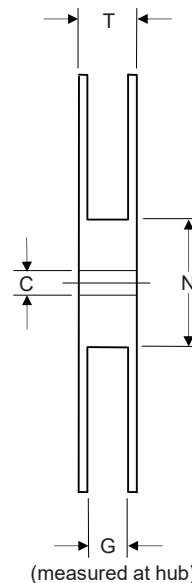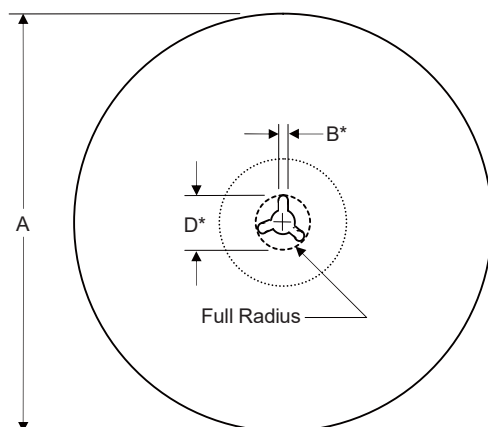


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
12mm	330	3.0	13.2	/	100	12.4	16.8
(Tolerance)	±2.0	+0.5/-0.2	±0.2	/	±0.5	±0.4	±0.6


Dimensions

Inbox size

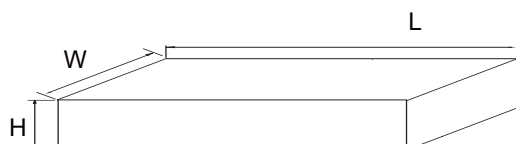

Dimension	Specification(mm typical)
	General
L	355
W	345
H	60

Carton sizeFeed Direction

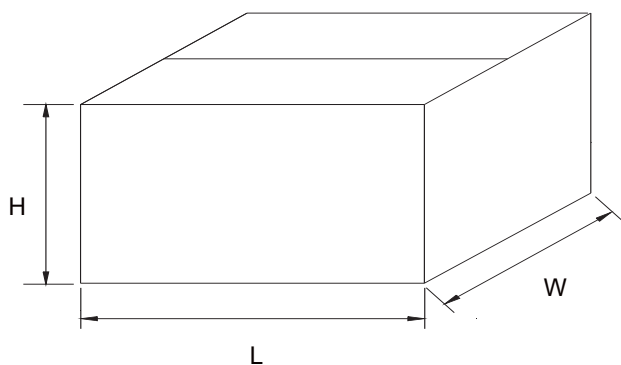

Dimension	Specification(mm typical)
	General
L	390
W	375
H	360